


## MODEL 199

1 Bracket

G1 On-board electrical system battery

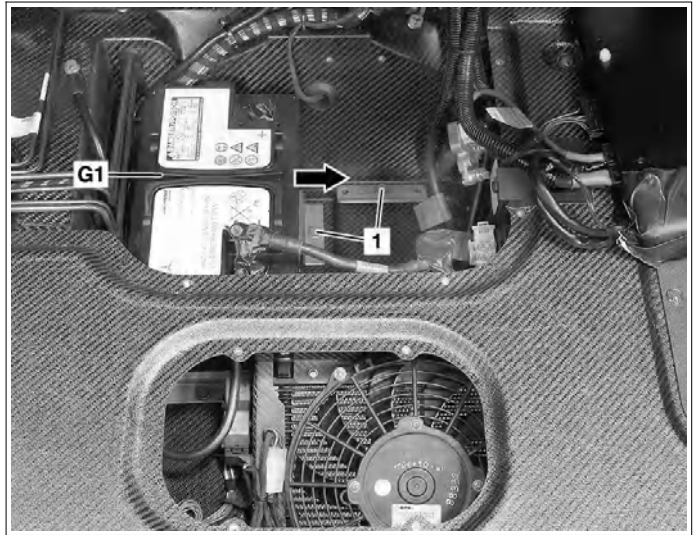

P54.10-2438-11

☒ ☒	<b>Remove/Install</b>	<p>No fire, sparks, open flames or smoking. Wear acid-resistant gloves and clothing and safety glasses with side guards. Do not place any conductive objects on the battery and avoid any short circuit from battery positive to ground. Only fill liquid battery electrolyte (diluted sulfuric acid) into suitable and appropriately marked containers.</p>	AS54.10-Z-0001-01A
i	Notes on AGM battery		AH54.10-P-0002-01A
1	Remove starter battery		AR54.10-P-0008SLR
2	Remove cradle (1)		
3	Move the on-board electrical system battery (G1) in the direction of the arrow		
4	Take out the on-board electrical system battery (G1)		
5	Install in the reverse order		